

GATB-Series Absolute Grade Meltblown Polypropylene

GATB-Series Absolute Grade Meltblown Polypropylene Filter Cartridges:

- Precision process control of fiber diameter and layer density tunes the media to achieve targeted retention efficiency and ensure consistent performance.
- All polypropylene construction presents excellent compatibility with a wide range of chemicals.
- Resists contaminant unloading, even at elevated differential pressures.
- All end configurations available (glued or thermally-bonded).
- Grooved exterior increases surface area.
- Easy cartridge incineration and disposal.
- Free of additives, wetting agents, binders and silicone.




Construction Materials

Filtration Media..... Polypropylene
End Caps..... Polypropylene
O-Rings/Gaskets..... Buna, EPDM, Polyfoam, Silicone, Viton®

Operating Conditions

Change Out ΔP (recommended).....35 PSID
Temperature (max).....140°F (60°C)
Differential Pressure (max).....50 PSID (3.4 bar) at 68°F (20°C)

Flow Rate vs Pressure Drop

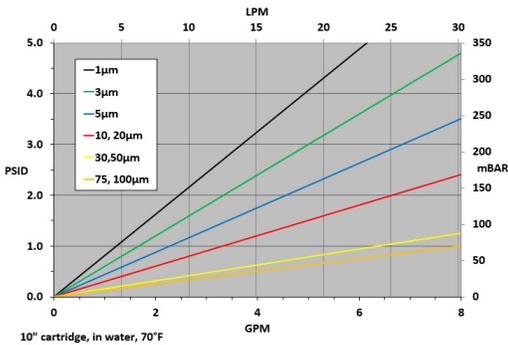

Dimensions (Nominal)

Length.....9.75 to 40 inches (24.8 to 102 cm)
Outside Diameter.....2.5 inches (6.4 cm)
Inside Diameter.....1.06 inches (2.69 cm)

Performance Specifications

Micron Ratings:
 1, 3, 5, 10, 20, 30, 50, 75, 100
Efficiencies:
 1-3 Micron: 95%
 5-100 Micron: 99%

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.



NSF Certification applies for use only with drinking water. Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified. Product options denoted with asterisk (*) are not included in the Certification.

Ordering Information

GATB	Rating (μ)	A	Length	-	End Cap Style	O-Rings/Gaskets	-	End Caps
Absolute Grade	1		9.75" (24.76cm)		Blank = None	Blank = None		Blank = Glued or None
	3		9.875" (25.08 cm)		2 = DOE Flat Gasket	B = Buna		CS = 316SS Compression Spring (TB ONLY)
	5		10" (25.4 cm)		3 = 222 w/Fin	E = EPDM		PC = Polypropylene Core
	10		19.5" (49.53 cm)		4 = 222 w/Flat Cap	*P = Polyfoam (Gaskets)		TB = Thermally-Bonded
	20		20" (50.8 cm)		5 = 222 w/Spring	S = Silicone		
	30		29.25" (74.29 cm)		6 = 226 w/Flat Cap	*V = Viton®		
	50		29.5" (74.93 cm)		7 = 226 w/Fin			
	75		30" (76.2 cm)		8 = 226 w/Spring			
	100		39" (99.1 cm)		9 = SOE w/ Spring			
			40" (101.6 cm)		10 = DOE w/PP Core Extender			
					20 = SOE PP Ext. w/Spring			

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available

DS_GATB_190701



Corporate Office
 7201 Mt. Vernon Road SE
 Cedar Rapids, IA 52403 USA

Phone
 Phone: + 1 877 603 1003
 Fax: + 1 319 743 0220

Online
 Website: www.globalfilter.com
 www.filtrationgroup.com