


GHPS-Series Polysulfone

GHPS-Series High Purity Polysulfone Filter Cartridges offer exceptional flowrate and loading capability by virtue of its highly asymmetrical pore structure. It's a preferred choice in applications requiring the efficiency of a membrane but where a longer service life is important. Its hydrophilic nature allows immediate wet-out and optimizes the utility of the membrane surface area. Manufactured in a high-purity, thermally-bonded construction for cleanliness and broad compatibility, the optional post-rinse feature provides a cartridge with quick rinse-up to 18 megaohms. Manufactured in a clean-room environment to maintain high standards of purity and cleanliness.

Flow Rate vs Pressure Drop

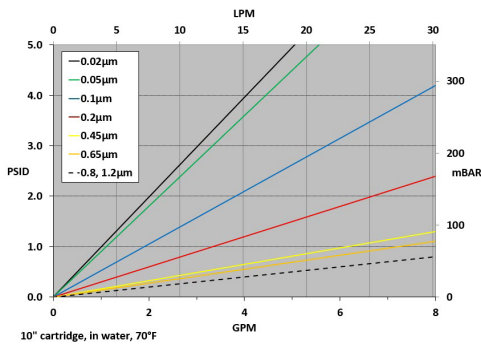

Typical Applications

- Deionized Water Systems
- General-Use Water Filtration
- Liquid Clarification
- Recirculating Fluids
- Chemical Filtration

Ordering Information

| GHPS | Rating (µ) | A | Length | C | End Cap Style | O-Rings/Gaskets | - | Adders |
|------|------------|---|----------------|---|--------------------------|-----------------------------------|---|-------------------------------|
| | 0.02 | | 10" (25.4 cm) | | 2 = DOE Flat Gasket | B = Buna | | CS = 316SS Compression Spring |
| | 0.05 | | 20" (50.8 cm) | | 3 = 222 w/ Fin | E = EPDM | | I = Stainless Steel Insert |
| | 0.1 | | 30" (76.2 cm) | | 4 = 222 w/ Flat Cap | S = Silicone | | R = 18 Megaohm Rinse |
| | 0.2 | | 40" (101.6 cm) | | 6 = 226 w/ Flat Cap | T = Teflon® Encapsulated Viton® | | |
| | 0.45 | | | | 7 = 226 w/ Fin | V = Viton® | | |
| | 0.65 | | | | 16 = 213 Internal O-Ring | Z = Teflon® Encapsulated Silicone | | |
| | 0.8 | | | | 28 = 222 3-tabs w/ Fin | | | |
| | 1.2 | | | | | | | |

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS_GHPS_220325



Construction Materials

Membrane.....Polysulfone
Support Media.....Polypropylene
End Caps.....Polypropylene
Center Core.....Polypropylene
Outer Support Cage.....Polypropylene
O-Rings/Gaskets.....Buna, EPDM, Silicone,
 Teflon® Encapsulated Viton®, Viton®,
 Teflon® Encapsulated Silicone

Sanitization/Sterilization

Filter Hot Water.....80°C for 30 min
Steam Sterilization.....121°C for 30 min.,
 multiple cycles

Chemicals: Cartridges are compatible with most chemical sanitizing agents.

Note: Stainless steel insert option required for all cartridges being hot water sanitized or steam sterilized.

Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

Dimensions

Length:
 10 to 40 inches (25.4 to 101.6 cm) nominal
Outside Diameter:
 2.70 inches (7.0 cm) nominal

Operating Conditions

Change Out ΔP (recommended).....35 PSID
Temperature (max).....176°F (80°C)
Differential Pressure (max).....50 PSID
 (3.4 bar) at 68°F (20°C)

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 1935/2004, and/or 10/2011.