


GPB-Series Bi-Component Polyolefin

GPB-Series Bi-Component Polyolefin Filter Cartridges feature thermally bonded co-extruded polyolefin fibers manufactured in a unique and proprietary process. The result is fiber-to-fiber point bonds forming a rigid, fixed-matrix pore structure. The performance benefit of this construction is a sharpened retention size cut-off. Furthermore, the enhanced matrix rigidity provides greater tolerance to differential pressures. This unique feature also prevents changes in fiber matrix throughout the life of the filter. Consistent precise filtration acts to prevent against contaminant unloading. GPB-series filter cartridges are free of additives, wetting agents, binders and silicone.

Flow Rate vs Pressure Drop

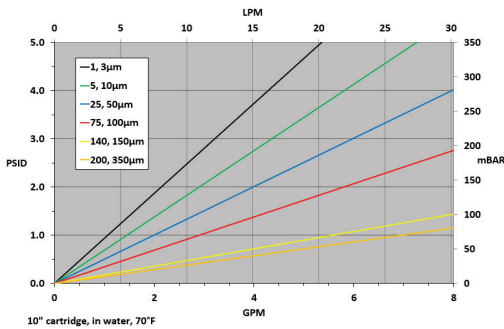

Typical Applications

- Paints and Coatings
- High-purity Inks
- Resins
- R.O. Pre-Filtration
- Food and Beverage
- Particle Classification

Construction Materials

Filtration Media..... Polyolefin
End Caps..... Polypropylene

Dimensions (Nominal)

- Length:**
9.75 to 40 inches (24.8 to 102 cm)
- Outside Diameter:**
2.6 inches (6.6 cm)
- Inside Diameter:**
1.1 inch (2.8 cm)

Operating Conditions

Change Out ΔP (recommended).....35 PSID
Temperature (max).....176°F (80°C)
Differential Pressure (max).....80 PSID
 (5.5 bar) at 68°F (20°C)

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

Ordering Information

GPB	Rating (µ)	-	Length	-	End Cap Style	O-Rings/Gaskets
Polyolefin	1 = Cuno "A"		9.75" (24.76 cm)		Blank = None	Blank = None
	3 = Cuno "B"		10" (25.4 cm)		2 = DOE Flat Gasket	B = Buna
	5 = Cuno "C"		19.5" (49.53 cm)		3 = 222 w/Fin	E = EPDM
	10 = Cuno "D"		20" (50.8 cm)		4 = 222 w/Flat Cap	P = Polyfoam
	25 = Cuno "E"		29.25" (74.29 cm)		5 = 222 w/Spring	S = Silicone
	50 = Cuno "G"		30" (76.2 cm)		6 = 226 w/Flat Cap	V = Viton®
	75 = Cuno "L"		39" (99.1 cm)		7 = 226 w/Fin	
	100 = Cuno "Q"		40" (101.6 cm)		8 = 226 w/Spring	
	140 = Cuno "V"				9 = SOE w/ Spring	
	150 = Cuno "W"				10 = DOE w/ Core Extender	
	200 = Cuno "X"					
	350 = Cuno "Y"					

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS_GPB_230113