
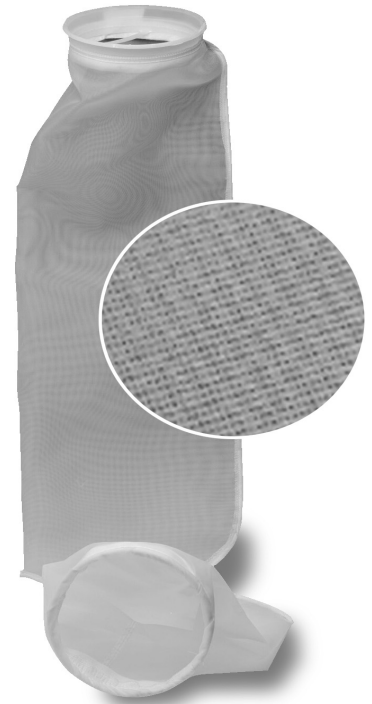


## Nylon mono-Filament Bag Filter

- Micron rating from 10 to 1600 microns
- Available in all industry standard sizes
- High flow/low pressure drop media
- Surface filtration
- High chemical compatibility
- Sewn construction with bias tape
- Standard handles on all bags
- No fiber loss
- High filtration capacity
- Temperatures up to 93°C
- Silicone-free construction
- Economical solution for contaminant retention non-deformable
- Stainless steel sealing ring or nylon flange
- Complies with the provisions of Section 177.1520 FDA Form 21 and EC1935/ 2004 - EU 10/2011 for food contact.

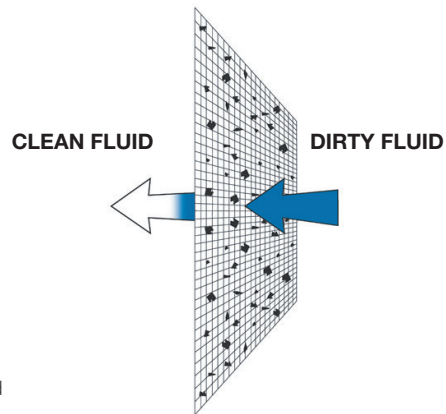

### Bag filter types

The bag filters have a stainless steel ring as standard. They are sewn with a bias tape as standard.

### Operating Conditions:

**Temperature (max)**.....93°C

**Differential Pressure (max)**.....2bar

### Typical Applications

- Paints and coats
- Inks
- Chemicals
- Process Water

### Micron Ratings (μ)

- 10
- 25
- 50
- 75
- 100
- 200
- 300
- 400
- 500
- 700
- 1000
- 1600

### Ordering Information

G	Media	Rating (μ)	Cover	Bag Dimensions			Connections	Options
				Size	Diam.			
	NMO = Nylon monofilament	10-1600	P = Plain				N = Nylon Molded Flange SS = Stainless Steel Ring	-1PK = Individual Packaging
				1	17,93 cm	41,91 cm		
				2	17,93 cm	81,28 cm		
				3	10,46 cm	20,32 cm		
				4	10,46 cm	35,56 cm		

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS\_GNMO\_220208