


## GFHD-Series Single-Cartridge Liquid Filter Vessels

The stainless steel GFHD-Series Single-Cartridge Vessels are suited for a wide variety of filtration applications. A ring-nut closure provides easy access for change-out. Equipment in accordance with PED 2014/68/UE, art4§3.

### Features

- DOE design features a spring-loaded bottom seat cup which allows for easy installation and positive seal
- Maximum temperature : 120°C
- Ring-nut allows for easy change-out (wrench pin is included as standard, spanner wrench is optional)
- 1/4" NPT dirty drain port allows for complete evacuation prior to change-out
- Available in 5", 10", 20", 30" lengths to accept cartridges up to 3" OD
- Offered in DOE, 222/FLAT or 226/FLAT configurations
- Heavy-duty cast head with mounting bracket
- Dual closure seal (EPDM standard)
- Optional 1/4" gauge ports drilled & tapped
- Available in 316 stainless steel

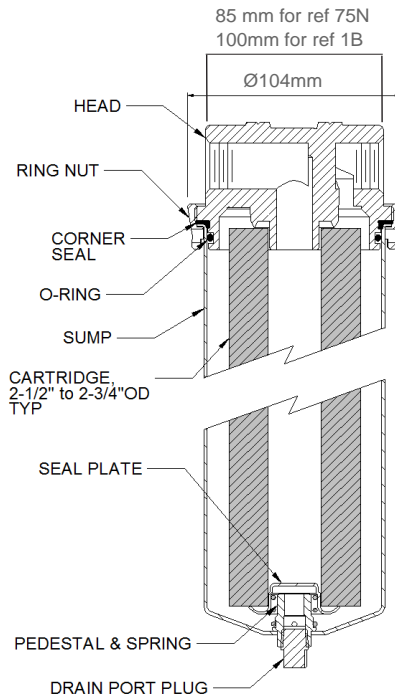

### Alternate Seal Materials (Sold Separately)

- Viton®\*
- Buna
- Teflon® Encapsulated Viton®\*

### Technical Specifications

Filter Type	Type of Fluid (PED)	Max Pressure Allowed For Liquid Use	Max Pressure Allowed For Gas Use
GFHD105	group 1	20 bar	20 bar
GFHD11			14 bar
GFHD12			7 bar
GFHD13			5 bar
GFHD105	group 2	20 bar	20 bar
GFHD11			20 bar
GFHD12			15 bar
GFHD13			10 bar



NSF Certification applies for use only with drinking water. Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified. Product options denoted with asterisk (\*) are not included in the Certification.

### Ordering Information

GFHD1	Length	Inlet/Outlet Size	End Configuration	Material	Pressure Rating	NSF	-	Adders
	05 = 5"	75N = 3/4" FNPT	D = DOE	6 = 316 SS	30 = 20 bar	Blank = None		25GP = Gauge Ports
		1B = 1" BSPP						
	1 = 10"	75N = 3/4" FNPT	2 = 222/FLAT					
		1B = 1" BSPP						
	2 = 20"	1B = 1" BSPP	6 = 226/FLAT					
	3 = 30"	1B = 1" BSPP						

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS\_GFHD\_EU220718