


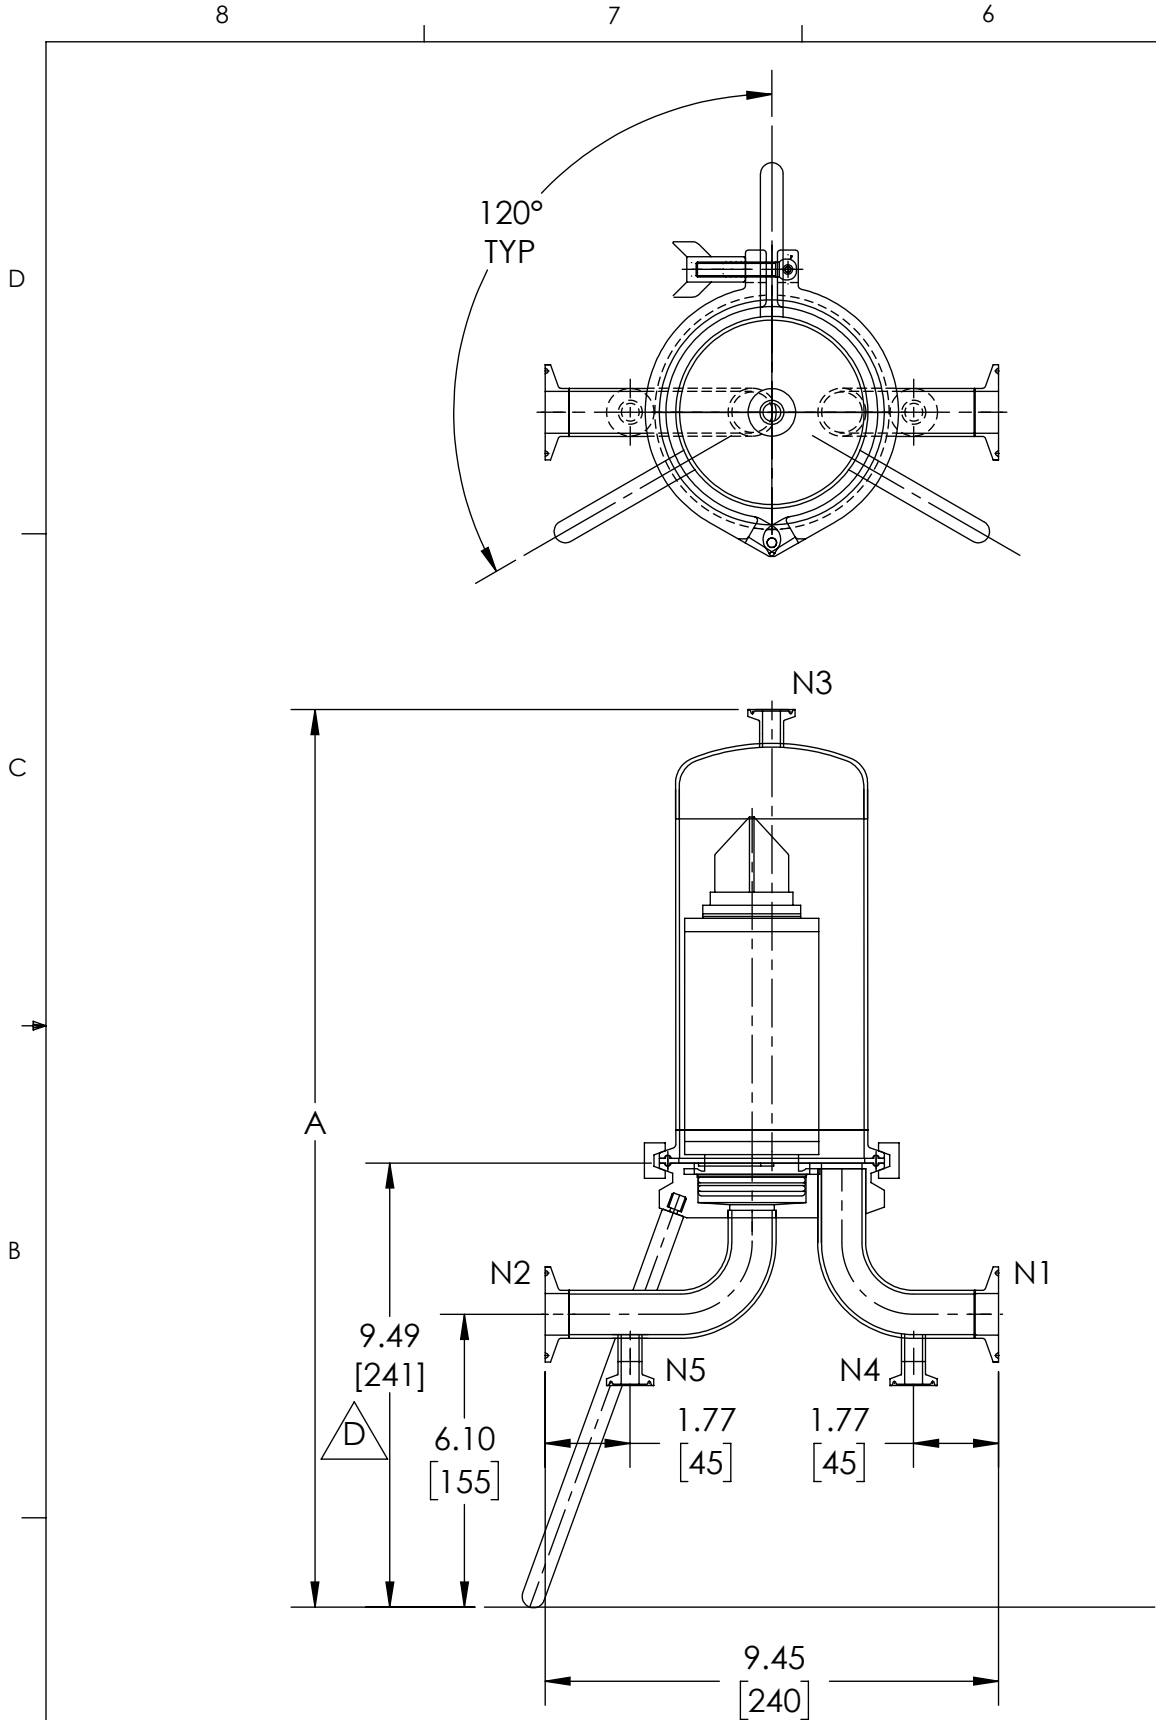

B

TABULATION			
PART NO.	DESCRIPTION	GLOBAL FILTER MODEL NO.	DIMENSION A inches [mm]
21290-01	FLTR HSG ASSY, GSTL 1" TC, 226, 5" 304 SS		18.94 [481]
21290-02	FLTR HSG ASSY, GSTL 1" TC, 226, 5" 316 SS	GSTL051T6615EP	18.94 [481]
21290-03	FLTR HSG ASSY, GSTL 1" TC, 226, 10" 304 SS		23.86 [606]
21290-04	FLTR HSG ASSY, GSTL 1" TC, 226, 10" 316 SS	GSTL11T6615EP	23.86 [606]
21290-05	FLTR HSG ASSY, GSTL 1" TC, 226, 20" 304 SS		33.70 [856]
21290-06	FLTR HSG ASSY, GSTL 1" TC, 226, 20" 316 SS	GSTL21T6615EP	33.70 [856]
21290-07	FLTR HSG ASSY, GSTL 1" TC, 226, 30" 304 SS		43.54 [1106]
21290-08	FLTR HSG ASSY, GSTL 1" TC, 226, 30" 316 SS	GSTL31T6615EP	43.54 [1106]
21290-09	FLTR HSG ASSY, GSTL 1" TC, 226, 40" 304 SS		53.39 [1356]
21290-10	FLTR HSG ASSY, GSTL 1" TC, 222, 40" 316 SS	GSTL41T6615EP	53.39 [1356]

NOZZLE SCHEDULE				
ITEM	SERVICE	SIZE	QTY	EXTERNAL FLANGE DIMENSION
N1	INLET	1"	1	ASME BPE V BAND CLAMP CONNECTION
N2	OUTLET	1"	1	ASME BPE V BAND CLAMP CONNECTION
N3	AIR VENT	1/2"	1	ASME BPE V BAND CLAMP CONNECTION
N4	INLET DRAIN	1/2"	1	ASME BPE V BAND CLAMP CONNECTION
N5	OUTLET DRAIN	1/2"	1	ASME BPE V BAND CLAMP CONNECTION

DESIGN DATA	
DESIGN CODE	GOOD ENGR. PRACT.
DESIGN PRESS.	150 psi [10.5 Kg/cm²]
WORKING PRESS.	135 psi [9.5 Kg/cm²]
DESIGN TEMP	250° F [121°C]
HYDRO TEST	195 psi [13.7 Kg/cm²]
SUITABLE FOR	226/FIN OR 226/FLAT TYPE CARTRIDGE

REFERENCE ENGINEERING DRAWING 21290

					GLOBAL FILTER LLC			
D	EC231002-01				TITLE: FLTR HSG ASSY, GSTL 1" TC, 226, TAB			
C	EC210303-01							
B	EC210107-01							
A	EC201022-01	FINISH			SEE NOTE 3			
REV	EC NUMBER		NAME	DATE				
		DRAWN BY	ME	10-23-20	SIZE B	DWG. NO. CS269		REV D
EC HISTORY		ENG APPR.	EG	10-27-20	SCALE: 1:1		WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
GLOBAL FILTER LLC. ANY
REPRODUCTION
IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF
GLOBAL FILTER LLC IS PROHIBITED.

- NOTES:
- DIMENSIONS ARE IN INCHES [millimeters].
 - UNLESS TOLERANCES ARE INDICATED, ALL DIMENSIONS ARE REFERENCE.
 - SURFACE FINISH:
 - INSIDE: MIRROR POLISH WITH EP <25 µin Ra (<0.63 µm Ra)
 - OUTSIDE: MIRROR POLISH <25 µin Ra (<0.63 µm Ra)